




- ✔ Use 1mm needle
- ✔ Test scratch damage under 8N-20N pressure
- ✔ Test Standard: FLTM BO 162-01



NEWTECHWOOD DECKING

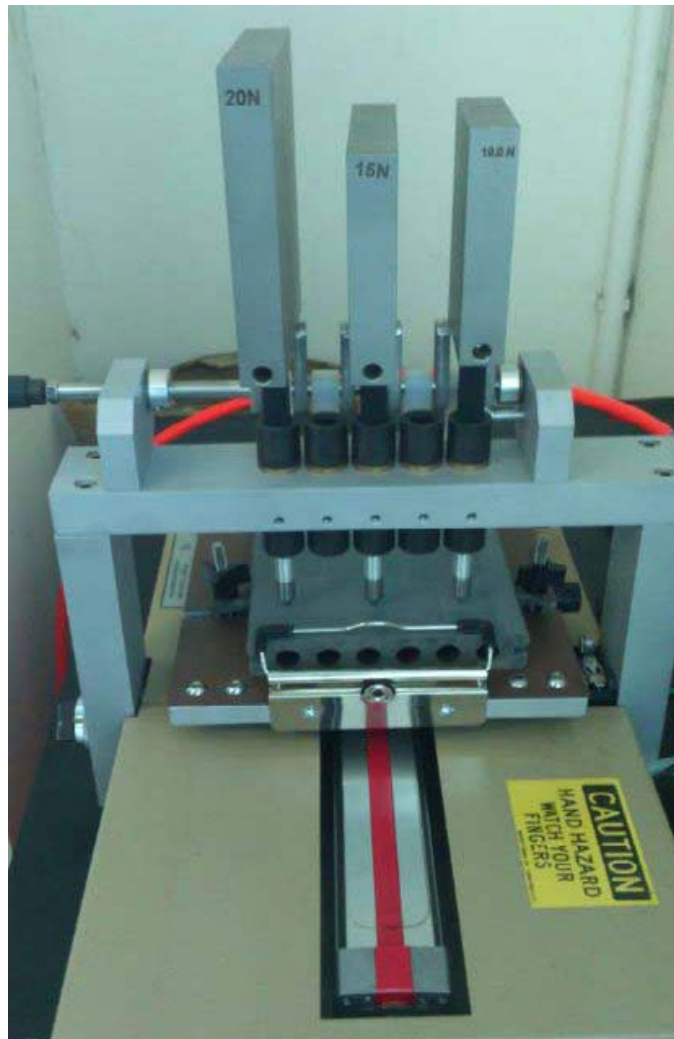

CONVENTIONAL DECKING




NEWTECHWOOD 20N: NO OBVIOUS MARK



CONVENTIONAL 8N: MARK APPEARS



NEWTECHWOOD 20N: NO OBVIOUS MARK

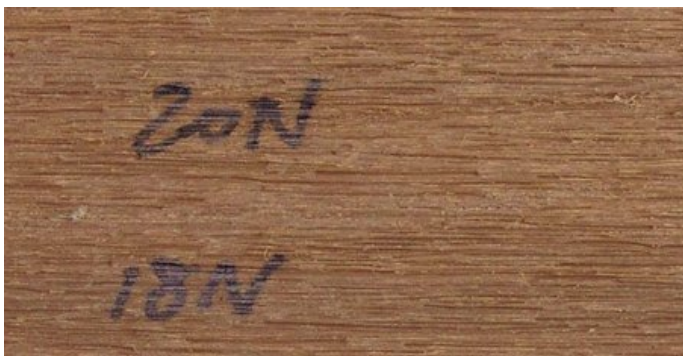

CONVENTIONAL 8N: MARK APPEARS



For more information:

VIC, TAS, SA



25 Gaine Road
Dandenong VIC 3175
T: (03) 8769 7111
E: ntw.vic@brittontimbers.com.au

ALL OTHER STATES – WA, QLD, NT



Head Office
24 Tichborne Street
Cockburn Central, WA 6164
T: (08) 9494 1051
E: info@urbandirectwholesale.com.au

**Websites: www.newtechwood.com.au
www.urbandirectwholesale.com.au**